



FADER REPLACEMENT GUIDE



Before opening the device,
please remove the USB cable.
Please don't touch the circuits
with your hands or screwdriver!




Necessary tools : Torx T8,
Philips Screwdriver




Follow the instructions in reverse to
reassemble the device

1.




Remove all fader caps

2.




Remove all screws from the
front panel

3.

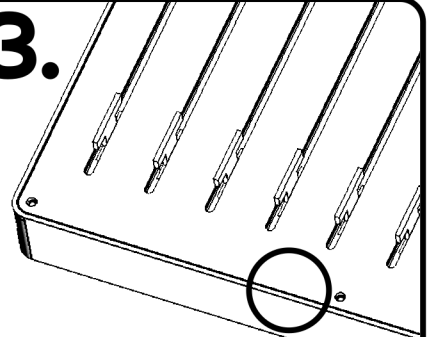

If necessary, use a tool such
as a flat screwdriver to lift
the front panel from the
designated location

4.

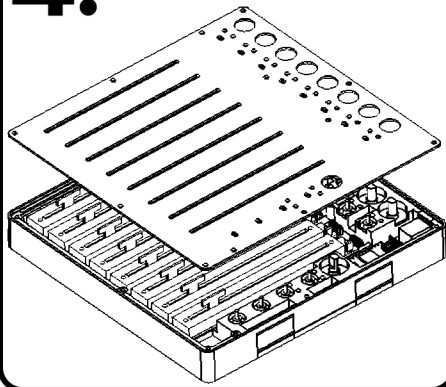


Remove the front panel

5.




Keep the light guides apart
At reassembly, put these
back after installing the
front panel

6.

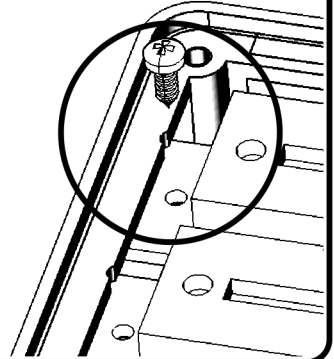


Remove the bottom screw of
the fader

7.

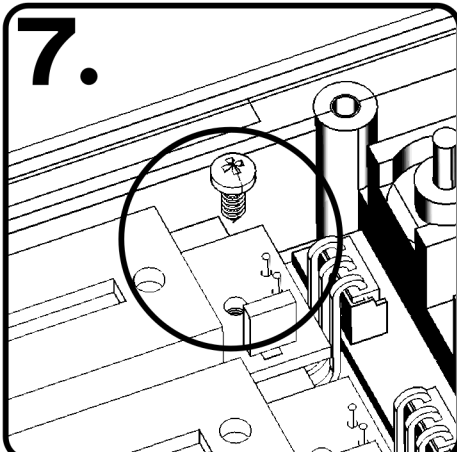


Remove the top screw of the
fader

8.

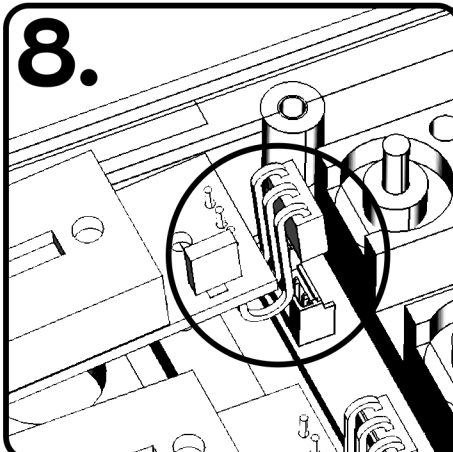

Disconnect the fader
connector

9.

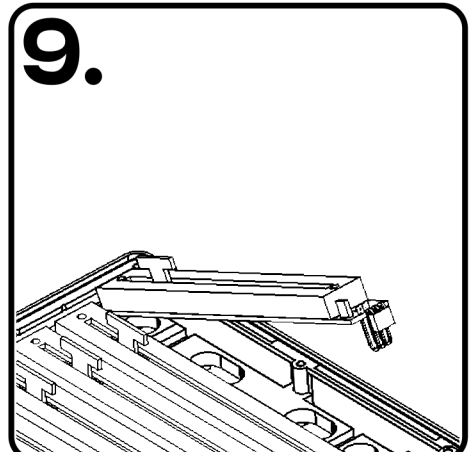

Replace the fader